


Calibration Certification and Installation Information

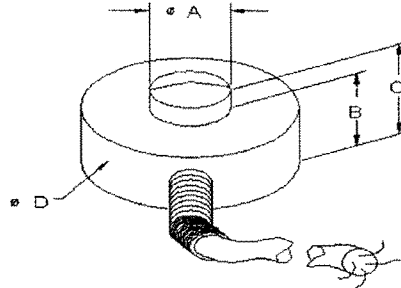

Dimensions, inch (mm)

Capacity (lbf)	A	B	C	D
5,10,25,50	0.09 (2.2)	0.09 (2.2)	0.12 (3.0)	0.38 (9.6)
100,250	0.12 (3.0)	0.13 (3.3)	0.15 (3.8)	0.50 (12.7)
500, 1K	0.24 (6.1)	0.22 (5.6)	0.25 (6.4)	0.75 (19.1)
2K	0.25 (6.4)	0.23 (5.8)	0.29 (7.4)	0.75 (19.1)

Electrical

Wire Color Code:	Red	+Excitation	Cable length: 5ft std.
	Green	+Output	
	White	-Output	
	Black	-Excitation	
	Shield	No Connection	

Application

To achieve rated performance the mounting and loading surfaces must be hard, flat, smooth, and parallel.

Specifications

Safe Overload:	150% RO	Nonlinearity:	0.25% FS
Nonrepeatability:	0.1% FS	Hysteresis:	0.25% FS
Excitation, nom:	5 V	Compensated Temp Range:	60 to 160 °F
max:	7 V	Operating Temp Range:	-65 to 250 °F
Load Cell Material:	Stainless Steel	Temperature Effect on Zero:	0.005% RO/°F

Interface, Inc., 7401 E. Butherus Dr., Scottsdale, AZ 85260, USA
 Phone: 480-948-5555 FAX: 480-948-1924 www.interfaceforce.com