


TORPEDO 800

Part No. 1114/1

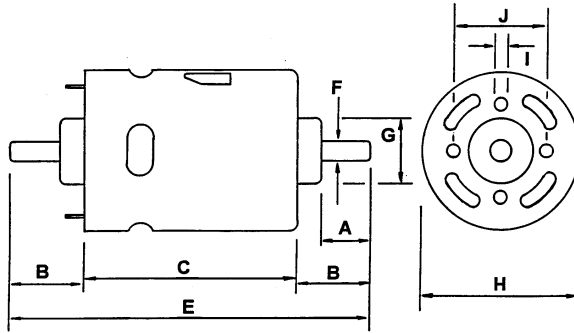


Weight 595g (approx)

DIMENSIONS	A	B	C	D	E	F	G	H	I	J	K
MILLIMETER	13.2	20.5	69.0		110.0	6.35	21.75	51.8	M5	32.0	
DECIMAL INCHES	0.520	0.810	2.720		4.330	0.250	0.860	2.040		1.260	

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	STALL TORQUE	
			R.P.M.	A	R.P.M.	A	oz - in	mN-m	W	%	oz - in	mN-m
RE - 800	12.0v	12.0v CONSTANT	5167	1.058	4289	5.28		82.08	36.88	58.2		482.8

TORPEDO 850

Part No. 1115/1

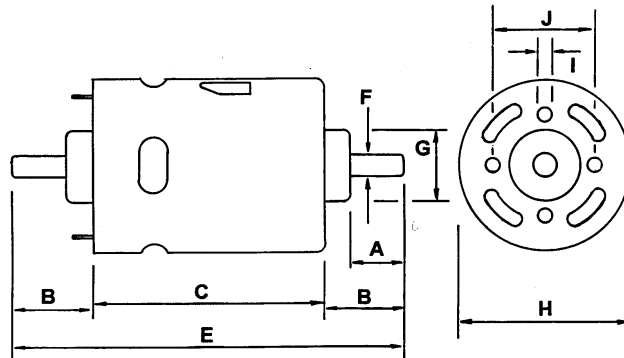

Weight 595g (approx)

DIMENSIONS	A	B	C	D	E	F	G	H	I	J	K
MILLIMETER	13.2	20.5	69.0		110.0	6.350	21.75	51.8	M5	32.0	
DECIMAL INCHES	0.520	0.810	2.720		4.330	0.250	0.860	2.040		1.260	

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	STALL TORQUE	
			R.P.M.	A	R.P.M.	A	oz - in	mN-m	W	%	oz - in	mN-m
RE - 850	12.0v	12.0v CONSTANT	9778	1.90	8311	10.82		92.13	80.16	61.74		614

BATTERIES

As MFA 'TITAN' batteries are sealed-lead-acid rechargeable batteries, the problems of liquid leakage, gas discharge, and tedious maintenance from conventional lead acid batteries now have been solved. As a result, MFA 'TITAN' batteries can be used as a power source for hobby & toy use, portable instruments such as VTR's, vacuum cleaners, electric powered bicycles, and electromotive tools that must be lightweight, compact and powerful. They can also be used for power back-up of OA-FA, U.P.S., telecommunication and emergency facilities requiring long term reliability. MFA 'TITAN' batteries are being used in a wide variety of applications in advanced high technical equipment.

FEATURES OF MFA 'TITAN' BATTERIES

The advantages of MFA 'TITAN' batteries over its conventional counterpart are numerous. They include:

- 1. Maintenance Free.** MFA 'TITAN' batteries have an excellent life with absolutely no maintenance required apart from routine charging.
- 2. No leakage of liquid or gas.** By a special sealing design, there is no leakage of liquid or gas, so it is safe for all applications, even when fully recharged, there is no possibility of leakage due to the recombination system which converts the gas into liquid. MFA 'TITAN' batteries can be installed safely in equipment with no leakage occurring.
- 3. Low in self-discharge rate.** MFA 'TITAN' batteries keep a low self-discharging rate and they also have a long life, because of using only specially selected lead, calcium-lead, and refined electrolytes.
- 4. Able to operate in a wide temperature range.** MFA 'TITAN' batteries can be used in temperatures ranging from as low as -20oC to as high as 50oC.
- 5. Economical and long life.** MFA 'TITAN' batteries are proven to have a longer life than conventional ones, due to improved durability from our specially selected Pb-Ca alloy.
- 6. Designed for high-discharging purpose.** MFA 'TITAN' batteries are designed especially for high-discharge current. They also have low internal resistance with stable voltage.
- 7. Available in any position.** Our special sealing design enables our batteries to operate in any position, even upside down.

Application of MFA 'TITAN' batteries.

Floating Application

- * Most Toy & hobby applications
- * Automatic fire alarm devices
- * All types of UPS
- * Other memory backup devices etc
- * Security & burglar systems
- * Telecommunication systems
- * Electronic cash registers

Cyclic Application

- * Portable video tape recorders
- * Communication and telephone equipment.
- * Medical electronics
- * Automatic fire alarm facilities
- * Cassette tape recorders
- * Cordless tools
- * Measuring equipment



CYCLON BATTERY 2V 2.5 AH.
PT. NO. 444
Sealed lead acid battery. "D" cell.

CYCLON BATTERY 2V 5 AH.
PT. NO. 444/1
Sealed lead acid battery. "D" cell.

PART NO.	NOMINAL VOLTAGE	NOMINAL CAPACITY (AH)				DIMENSIONS								WEIGHT (APPROX)	
		20 HR	10 HR RATE	5 HR RATE	1 HR RATE	LENGTH		WIDTH		HEIGHT		HEIGHT OVER TERMINAL			
						(MM)	(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	(INCH)	(LB)	(KG)
178	2	10.5	-			54	2.13	57	2.24	95	3.74	101	3.98	1.54	0.70
629	6	3.0	-	2.60	1.80	134	5.28	34	1.34	60	2.36	66	2.61	1.43	0.65
177	6	4.0	3.80	3.60	2.40	70	2.76	47	1.85	102	4.02	108	4.25	1.72	0.78
1153	6	12.0	11.0	10.0	7.3	151	5.95	50	1.97	94	3.70	100	3.94	4.4	2.0
1095	12	1.2	1.13	1.1	0.72	99	3.9	48	1.9	52	2.05	58	2.3	1.26	0.57
1084	12	1.9	1.79	1.71	1.14	177	6.97	34	1.34	60	2.36	66	2.60	1.66	0.75
887	12	3.0	2.73	2.55	1.80	134	5.28	67	2.64	60	2.36	68	2.68	2.87	1.30
1113	12	7	6.44	6.30	4.20	151	5.95	65	2.56	94	3.70	100	3.94	6.06	2.75
1119	12	12				151		98		94					4.00

BATTERY CHARGERS



2V - 6V - 12V CHARGER. Suitable for trickle charging 2, 6 or 12v lead acid batteries (wet or sealed dry type). Regulated at approx. 1/2 amp (recommended charge rate for most model size batteries). LED's indicate unit operation. Fused for overload protection. Size 128mm x 97mm x 58mm.

Part No. 229

'TITAN' PLUG IN CHARGER. For charging 12v lead-acid batteries. Plugs directly into mains wall socket. Charge rate 720 ma. approx. Features 'charge-complete' indicator. In line fuse and thermal fuse for safety. Instructions included.

PART NO. 827



'TITAN' PLUG IN CHARGER. For charging 6v lead-acid batteries. Plugs directly into mains wall socket. Charge rate 1/2 amp approx. Features 'charge-complete' indicator. In line fuse and thermal fuse for safety. Instructions included.


PART NO. 1077/5MOD

Variable speed transformer suitable as a 12volt power source (up to 15v on lower loads) for all Como Drills and 12V gearbox units. It is designed to maintain torque throughout the speed range. The unit is double insulated,protected by a thermal device and rated at 12v D.C. 36 VA.

Part No. 400DHD.



**New MFA 10W Solar Panel.
Part No. SP10**

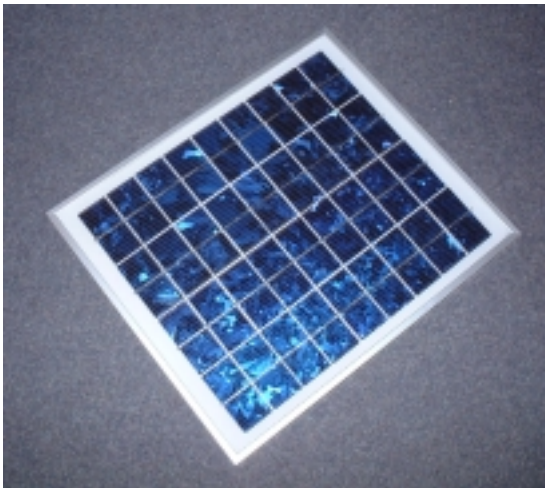


In order to preserve our environment, the use of fossil fuels will need to be replaced by renewable power sources such as wind, solar, hydrogen etc. MFA/Como has introduced two high specification solar panels of practical size and output to aid research and development and power models.

The cells are sealed, weather and ultraviolet resistant and will operate effectively from -25 deg C to 90 deg C. They will operate up to 100 humidity. They are TUV approved and CE marked.

- Typical applications include:-
- REMOTE TELEMETRY
 - INSTRUMENTATION SYSTEMS
 - SECURITY SENSORS
 - LAND BASED NAVIGATION AIDS
 - EMERGENCY LIGHTING
 - POWER SOURCE FOR MODELS AND EDUCATIONAL PROJECTS
 - OFF GRID POWER SUPPLIES
 - POWER SOURCE FOR ELECTRIC FENCING.


Part No. SP10

Peak Power (W)	10W
Max. Current (ImP)	0.555A
Max. Voltage (Vmp)	18V
Short Circuit Current (Isc)	0.58A
Open Circuit Voltage (Voc)	21.6V
Dimensions	340 x 290 x 25mm
Weight	1.26kg

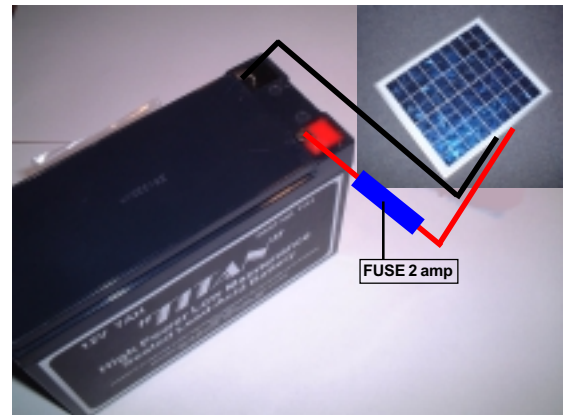

New MFA 30W Solar Panel.

Part No. SP30

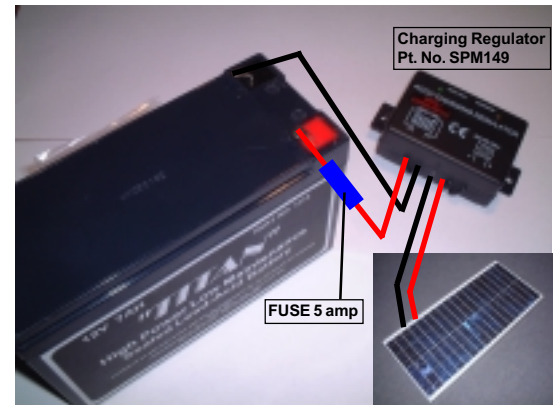

Part No. SP30

Peak Power (W)	30W
Max. Current (ImP)	1.66A
Max. Voltage (Vmp)	18V
Short Circuit Current (Isc)	1.82A
Open Circuit Voltage (Voc)	21.8V
Dimensions	736 x 342 x 25mm
Weight	2.9kg

Solar Charging Regulator. Part No. SPM149.

This unit is an electronic switch that switches on the connection to the solar cells if the battery is empty and switches off again when the battery is fully charged. There is a charging LED and a battery full LED on the unit.

For use with a variety of applications including solar panels, 12v batteries, motorgearboxes etc.



CLOCKWORK TIMER. Pt. No. 618
Compact 30 minute clockwork timer supplied with an easy push fit knob with cursor indication. Unit is faced mounted by 4 only 4x1/4" self tapping screws. Dims 49 x 44 x 46mm. excluding knob shaft.



12volt FLUORESCENT LAMP. Pt. No. 1121/3
Energy saving lamp providing approx. 120w white light with power consumption of only 21w. E27 screw fitting. Ideal where no mains supply is available.

**12V OPERATION ONLY
NOT TO BE USED WITH MAINS ELECTRICITY
SUPPLY.**



12volt LAMP HOLDER. Pt. No. 1121/5
Plastic construction with aluminium alloy E27 screw socket. Two fixing holes. Ideal for use with 12v fluorescent lamp. Mounting ring dia. 63mm.

**12V OPERATION ONLY.
NOT TO BE USED WITH MAINS
ELECTRICTY SUPPLY**

The MFA/Como Drills

45

Mini Drill Kit

Part No. 399DPLUS

**DRILLS
CUTS
POLISHES
ENGRAVES
SANDS
CARVES
ETC.**

**WOOD
PLASTIC
METALS
COMPOSITES
GLASS
CERAMICS
ETC.**

- * Includes new "MicroTurbo 1 plus" handset.
- * Powerful, precise and very compact mini drill.
- * 16 piece toolkit includes drills, burrs, abrasives, brushes, cutting disc, mop, etc.
- * carry case with rigid plastic workstation insert.
- * 220/240v input, 12 volt output, variable speed transformer with electronic (torque maintained) circuitry.



**MAKES LIGHT WORK OF THOSE MORE DIFFICULT INTRICATE TASKS
IN THE HOME AND WORKSHOP.**

Thunderbolt 46

Powercuts! - Emergency lighting a problem?

In inaccessible areas the MFA/Como Thunderbolt Rechargeable Freestanding Lamp is your answer

MFA/Como set new standards with the

MK2 'THUNDERBOLT STAND-ALONE LAMP'

now 1.1/2Kg (3lbs) LIGHTER with VARIABLE LIGHT OUTPUT (via dimmer).

- * Ultra bright 21W flourescent light.
- * Long duration.
 - up to 10 hours on max,
 - up to 15 hours on mid,
 - up to 24 hrs low setting.
- * Rechargeable.
- * Rugged and stable.
- * Weather resistant.
- * Removeable reflector for all round lighting.
- * Internal circuit protection.
- * Spares and service readily available
- * Now just 4 kgs.




Includes advanced 3 stage charger
(allows continuous connection for battery charging when lamp not in use)

OPTIONAL EXTRA.

To recharge your Thunderbolt Lamp in remote situations Fishing, Camping etc.

MFA SOLAR PANEL.(Part No. SP10T.)

12 volt 10 watt output. In average sunlight conditions will recharge Thunderbolt battery in approx 10 hours from battery low condition.



Spares readily available.

NO RISK OF PETROL/PARAFFIN CONTAMINATION - NO MANTLE PROBLEMS

Part No. 1122

includes the advanced 3 stage charger.

MFA/COMO DRILLS FELDERLAND LANE. WORTH. DEAL. KENT. CT14 0BT

TEL: 01304 612132.
E-MAIL: info@mfacomo.com

FAX: 01304 614696
www.mfacomodrills.com

THE ABOVE FIGURES ARE A GUIDE ONLY AND DO NOT FORM ANY CONTRACTUAL OBLIGATION ON THE PART OF MFA/COMO DRILLS.

MFA '3 watt' LED HEADLAMP. Part No. 1077MK4COMP



**'3'
watt
LED
NEW
FOR
2006**

**PROVIDES APPROX. 5 - 25 HOURS OF
USABLE LIGHT FROM A FULL CHARGE
(DEPENDING ON SWITCH MODE)**



**'3 watt' LED
HEADLAMP COMPLETE.
Part No. 1077MK4COMP**

**This kit consists of the
headlight, pre-wired extendable curly coil lead,
pre-charged 6v 4ah battery including
'splash-proof' battery pouch,
plug-in wall battery charger.**

**MFA 2'n'1 DUAL ZOOM HALOGEN & 3 LED HEADLAMP
Part No. 1077MK3COMP****2 'n' 1 Dual Zoom****Headlamp complete.****Part No. 1077MK3COMP**

This kit consists of The Base Headlamp (Pt.No. 1077/27) and the extended duration kit (Pt. No. 1077D) i.e. Dual zoom Headlamp, spare halogen bulb, extendable curly coil lead with voltage dropper, pre-charged 6v 4ah waist battery pack including 'splash-proof' battery pouch, plug-in dry cell back-up battery pack (batteries not included), plug-in wall battery charger.

**R.R.P. £64-95
(inc VAT)****HALOGEN**

Proven Halogen high intensity bulb.
ZOOM facility gives flood - to - beam.

White led's giving low intensity
3 led's
pre-focused beam.

A combination giving exceptional endurance.
7.5 to 45
hours per charge
dependant on low/
high switch
selection

Also available as separate options:-
BASE HEADLAMP (Pt. No. 1077/27)
EXTENDED DURATION KIT (Pt. No. 1077D)

All spares readily available

ACCESSORIES FOR 917D, 917D/A, 920D, 920D/A, 927D & 927D/A.

R.R.P. (Inc VAT)

RACK & PINION SET. PT.No.917D/1. Consists of 1 rack 917D2430, 1 pinion 9177D2401, 2 self-tapping mounting screws. For turning the rotary output of the gearbox to linear one. The pinion gear is a press fit onto the shaft, be careful not to bend the shaft. The rack can be attached to most surfaces e.g.wood/plastic/metal by drilling the appropriate size holes first to take the self-tapping screws.

£1-69

GEAR SET. PT.No. 917D/2. Consists of 1 pinion 917D2458, 2 orange gears 917D2452 & 4 green gears 917D2456. This is a spare set of gears for the gearbox (to replace worn/broken ones), as well as an 'add-on' additional gear set to obtain very slow output shaft speeds. To use as an additional gear set, add further GREEN (not orange) gears to the two shafts until the desired r.p.m. is obtained

£2-69

CHAIN & SPROCKET SET. PT.No. 917D/3. Consists of 2 small chain sprockets 8 tooth 917D2445, 2 large sprockets 16 tooth 917D2446, and 1 metre (approx)) length of chain 917D2449. For vehicle/robot final drive etc. Use two large or two small to obtain 1 to 1 ratio, one large and one small to obtain reduction as desired. The chain can easily be cut to desired length(s) by opening each side of a link with a pair of pointed pliers, removing a length and the links carefully tightened again. The sprockets are a press-fit onto the gearbox shaft so, be careful not to bend the shaft!

£7-68

WORM DRIVE SET. PT.No.917D/4. Consists of 1 worm gear 917D2420 and 1 spur gear 917D2404.To obtain very slow output speeds as well as turning the output through 90 degrees. The pinion gear is a press fit onto the gearbox shaft, be careful not to bend! Note the spur gear has many holes moulded in it, these can be used for operating micro-switches by simply inserting appropriate pins/nuts & bolts.

£1-69

CROWN WHEEL & PINION. PT.No.917D/5. Consists of 1 crown wheel 917D2440 and one pinion 917D2401. For turning the output shaft drive through 90 degrees. The pinion is a press fit onto the gearbox shaft, be careful not to bend!

£1-48

SPUR GEAR SET. PT.No.917D/6. Consists of 1 each spur gear 10 tooth 917D2401, 20 tooth 917D2403 & 40 tooth 917D2404. For reducing/increasing the r.p.m. of the gearbox shaft. Also for taking the drive away from the gearbox (e.g. vehicle drive axle).

£1.97

PULLEY SET. PT. No.917D/7. Consists of one 8/5.5mm dia pulley, one 14/10mm dia pulley, one 30/25mm dia pulley 3.9mm bore with brass sleeve to free wheel on 3mm dia shaft, one 70 x 5mm "O" ring belt drive and two micro-switch pins.

£6-35

ALL ITEMS IN THIS RANGE CARRY THE C €
MARK WHERE APPLICABLE.

DELIVERY & PACKING. For all orders please add £2-50.
(UK mainland only) Please allow for postal delivery times.

gearbox.3

MFA /COMO DRILLS FELDERLAND LANE, WORTH, DEAL. KENT. CT14 0BT.

TEL: 01304 612132.
E-MAIL: info@mfacomo.com

FAX: 01304 614696
www.mfacomodrills.com

THE ABOVE FIGURES ARE A GUIDE ONLY AND DO NOT FORM ANY CONTRACTUAL OBLIGATION ON THE PART OF MFA/COMO DRILLS.

ACCESSORIES FOR 917D, 917D/A, 920D, 920D/A, 927D & 927D/A

R.R.P. (inc VAT)

In-Line Coupling, 3mm-3mm	Pkt of 1	£3.50
In-Line Coupling, 3mm-4mm	Pkt of 1	£4.50
Voltage Regulator 6v-15v DC Input, 1.5v, 1.5amp output		£6.50
Gearing Motor Kit		£6.50
Gear, 10 tooth, 2.9mm bore.		29.95
Gear, 15 tooth, 2.9mm bore.		£3.38
Gear, 20 tooth, 2.9mm bore.		£3.68
Gear, 40 tooth, 2.9mm Bore.		£4.09
Stop Rings.		£2.99
Micro-switch operating pins.		£0.99
Worm Drive.		£4.09
Custom Gearbox Brackets		£1.09
Gearbox Brackets		£6.20
Rack		£4.79
Crown Gear		£3.38
Chain Sprocket, 8 tooth 2.9mm bore		£4.09
Chain Sprocket, 16 tooth 2.9mm bore		£4.09
Chain in 1 metre length approx.		£6.20
Double Gear, 48/12, 2.9mm bore		£3.38
Double Gear, 48/12, 3.1mm bore		£3.38
Pinion - 12 tooth (for motor), 1.9mm bore		£2.68
Pulley - 14/70mm dia, 2.9mm bore		£10.86
Pulley - 30/25mm dia, 2.9mm bore		£14.38
Pulley - 30/25mm dia, 3.9mm bore with brass sleeve		£15.44
Pulley - 8/5.5mm dia, 2.9mm bore		£7.33
Robotic Wheels - 28mm x 10mm, 2.6mm bore		£0.80
Robotic Wheels - 35mm x 7mm, 2.6mm bore		£0.98
Robotic Wheels - 51mm x 16mm, 2.6mm bore		£2.49
Robotic Wheels - 79mm x 19mm, 3.5mm bore		£1.45
Robotic Wheels - 37mm x 16mm, 2.6mm bore		£1.35
Robotic Wheels - 44mm x 16mm, 2.6mm bore		£2.67
Robotic Wheels - 56mm x 16mm, 2.6mm bore		£1.65
Robotic Wheels - 54mm x 30mm, 2.6mm bore		£1.35
'O' Ring, 70mm x 5mm dia.		£1.47
Perforated Metal Strip, 8.5mm x 300mm		£3.53
Perforated Metal Sheet, 150mm x 200mm		£1.95
Shaft (long for output) 3mm dia		£4.79
Shaft (short for intermediate) 3mm dia		£4.09
Brass spacer 5mm		£1.18
Brass spacer 8mm		£1.18
Spacers - 25mm		£2.99
Spacers - 30mm		£2.99
Gearbox Brackets		£1.09

ACCESSORIES FOR 918D SERIES GEARBOX, (WITH RE280 MOTOR & RE280/1 MOTOR)

In-Line Coupling, 2mm - 3mm.	Pkt of 1	£3.75
In-Line Coupling, 4mm-4mm.	Pkt of 1	£3.75
Pinions (plastic) 12 tooth	Pkt of 1	£2.68
Pulley 25mm Dia (Aluminium)(2mm bore)	Pkt of 1	£5.65
Pulley 25mm Dia (Aluminium)(4mm bore)	Pkt of 1	£5.65
Pulley 16mm Dia (Aluminium)(2mm bore)	Pkt of 1	£5.20
Pulley 16mm Dia (Aluminium)(4mm bore)	Pkt of 1	£5.20
Gear Adapter (for 917D2401, 2402, 2403, 2404)(2mm bore)	Pkt of 1	£3.95
Gear Adapter (4mm bore)	Pkt of 1	£3.95
Nylon bevel gears 1:1 (4mm bore)	Pkt of 1	£2.95
'O' Ring 70mm x 5mm Dia	Pkt of 1	£1.47
Voltage Regulator, (6-15v DC input, 1.5v, 1.5amp output)		£6.50
Steel Shaft (4mm OD x 150mm)		£1.95
Universal Coupling (4mm - 4mm)		£6.95

R.R.P. (inc VAT)

In-Line Coupling, 6mm - 6mm	Pkt of 1	£3.50
In-Line Coupling, 6mm - 8swg (mechano)	Pkt of 1	£4.95
In-Line Coupling, 5mm - 6mm	Pkt of 1	£4.95
Universal Coupling, 6mm - 6mm	Pkt of 1	£4.95
In-Line Coupling, 5mm - 5mm	Pkt of 1	£3.50
Voltage Regulator, (6-15v DC input, 4v-12v output)		£11.50
Regulator (as 919D2, Panel Mounted)		£13.95
Pulley 25mm Dia (Aluminium)(6mm bore) Pkt of 1		£5.95
Pulley 16mm Dia (Aluminium)(6mm bore) Pkt of 1		£5.50
Timing Pulley 10 tooth	Pt No 919D5	
Timing Pulley 12 tooth	Pt No 919D7/10	£3-95
Timing Pulley, 14 tooth	Pt No 919D7/12	£3-95
Timing Pulley, 16 tooth	Pt No 919D7	£4-95
Timing Pulley, 20 tooth	Pt No 919D8	£4-95
Timing Pulley, 25 tooth	Pt No 919D9	£5-95
Timing Pulley, 30 tooth	Pt No 919D10	£6-95
Timing Pulley, 35 tooth	Pt No 919D11	£7-95
Timing Pulley, 40 tooth	Pt No 919D12	£8-95
Timing Pulley, 44 tooth	Pt No 919D13	£9-95
Timing Belt, Length (circumference) 165mm	Pt No 919D14	£10-95
Timing Belt, Length (circumference) 185mm	Pt No 919D15	£4-71
Timing Belt, " " 200mm	Pt No 919D16	£4-71
Timing Belt, " " 305mm	Pt No 919D17	£4-71
Timing Belt, " " 390mm	Pt No 919D18	£5-22
Timing Belt, " " 455mm	Pt No 919D19	£5-50
Timing Belt, " " 545mm	Pt No 919D20	£5-75
Timing Belt, " " 630mm	Pt No 919D21	£5-95
Timing Belt, " " 840mm	Pt No 919D22	£6-50
Bevel Gearbox 1:1	Pt No 919D23	£7-50
Steel Shaft, 5mm OD x 150mm	Pt No 919D24	£19-95
Steel Shaft, 6mm OD x 150mm	Pt No 919D25	£6-26
Gear Adapter (for 917D2401, 2402, 2403, 2404)	Pt No 919D26	£1.95
RFI Screening self adhesive 210mm x 297mm	Pt No 919D26/1	£1.95
Double Ended Motor Mount	Pt No 919D27	£3.95
Bearing Blocks, 5mm I.D.	Pt No 919D28	£7-05
Bearing Blocks, 6mm I.D.	Pt No 919D29	£2-50
Spare 8mm pinion	Pt No 919D30/1	£9.87
Sound absorption pad	Pt No 919D31	£1.76
'O' Ring 70mm x 5mm Dia	Pt No 919D32	£0.99
Universal Coupling (6mm - 6mm)	Pt No 917D2515	£1.47
'O' ring (70 x 5mm)	Pt No 1105/60	£6-95
	Pt No 917D2515	£1-47

ACCESSORIES FOR GEARBOXES, 917D, 917D/A, 918D, 919D, 920D & 920D/A

Motor Suppression Kit.	Pt No 259	£0.75
Sound Suppression Kit	Pt No 308B/GB	£1.50
Solar Panel, 95 x 65 x 7.5mm, 0.45volt output	Pt No 1070	£5.95
Anti Vibration Mounts M3 (Rubber size, dia, 8mm, Length 8mm)(Pkt 4)	Pt No. 1071	£6.84
Anti Vibration Mounts M4 (Rubber size, dia 15mm, Length 15mm)(Pkt 4)	Pt No. 1072	£6.99

MFA/COMO DRILLS 'TITAN' BATTERIES.

2v 10.5 AH, Re-chargeable sealed lead acid.	Pt No 178	£9.53
6v 4 AH, " " " "	Pt No 629	£17.95
6v 12 AH, " " " "	Pt No 177	£9.40
12v 1.2 AH, " " " "	Pt No. 1153	£18-96
12v 1.9 AH, " " " "	Pt No. 1095	£12-97
12v 3 AH, " " " "	Pt No. 1084	£15-66
12v 7 AH, " " " "	Pt No 887	£18-95
12v 12 AH, " " " "	Pt No. 1113	£18-95
	Pt No. 1161	£34-95

Battery Charger for above, MFA 2-6-12 Charger	Pt No 229	£25.95
Battery Charger Plug-in, 12 volt	Pt No 827	£11-95
Battery Charger Plug-in, 6 volt	Pt No. 1077/SMOD	£11-95
Variable Speed Transformer	Pt No. 400DHD	£44-09

TEL: 01304 612132.
E-MAIL: info@mfacomo.com

FAX: 01304 614696
www.mfacomodrills.com

MFA/COMO DRILLS FELDERLAND LANE, WORTH, DEAL, KENT, CT14 0BT.

THE ABOVE FIGURES ARE A GUIDE ONLY AND DO NOT FORM ANY CONTRACTUAL OBLIGATION ON THE PART OF MFA/COMO DRILLS.

DELIVERY & PACKING. For all orders please add £2-50.
(UK mainland only) Please allow for postal delivery times.

